


Feuchtraummatte SoftStep

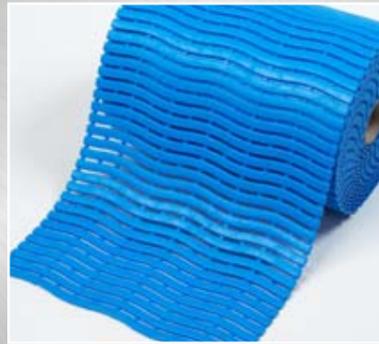

- Anti-bacterially treated polyethylene prevents growth of fungi or bacteria and promotes hygiene in wet areas.
- Drainage matting creating a healthier and safer environment in shower facilities.
- Its unique design affords not only instant drainage and slip resistance; it also prevents the growth of micro-organisms which cause skin disease such as athletes' foot and Tinea.
- Anti-slip base improves safety.
- Design permits water to flow freely.
- Pleasantly soft and warm under bare feet.
- Easy to install and relocate.
- Optional clips to connect side-by-side.

| PRODUCT SPECIFICATIONS | |
|------------------------|--|
| Designation | Hygienic matting for wet areas |
| Type | Anti-slip / drainage |
| Description | Anti-slip mat, open wave design |
| Material | 50% Polyethylene, 50% EVA Escorene |
| Process | Injection moulding |
| Category | Better |
| Recommended use | Light duty – hygienic and safe matting for wet areas : swimming pools, shower areas, dressing rooms, wardrobes, saunas |
| Colours | White-Dotted, Beige, Blue |
| Weight | 4.3 kg/m ² |
| Thickness | 9 mm |
| Standard sizes | 60 cm x 15 m |
| Custom sizes | 60 cm per linear meter |
| Special remarks | Accessories: connector clips for width-wise expansion UV Stabilized |

| PRODUCT TESTING | | |
|--------------------------------|---|---|
| Tests | Norms | Results |
| Compression deflection | U.S. | |
| | 1.4 kg/cm ² | |
| | 2.8 kg/cm ² | |
| Foam battery | ASTM D3574 | |
| Abrasion resistance | ASTM D3884-01 | |
| | 500 Cycles | |
| | 1000 Cycles | |
| Static coefficient of friction | ASTM C1028-96 | |
| Elongation | ASTM D412 | |
| Breaking load | ASTM D412 | |
| Graves tear strength | ASTM D 1004 | |
| Hardness | ASTM D2240-02 | |
| Anti-slip | DIN 51130 and BG-RULE BGR181 | |
| Sanitary epidemiologic test | GN 2.1.6.1338-03 MCL GN 2.1.6.2309-07 OBUV | Pass - Certificate no. 77.01.16.251.P.044983.07.09 |

| FIRE TESTING | | |
|----------------|--|-----------------------|
| | Critical radiant flux | ASTM E-648 |
| | Fire retardancy | DIN4102 EN 13501-1 |
| | Flammability test | ASTM D2859 |
| Sanitized | MBE 97- 65 | Pass |
| Sustainability | <ul style="list-style-type: none"> • Reach Compliant (Registration, Evaluation, Authorization and Restriction of Chemicals) | |

Zu beziehen bei:
 Werkzeug-Profi.net | Matten-Zuschnitt.de
 info@werkzeug-profi.net, 0 63 59/96 11 906